


XTREME
SAVE Pro

Midea

SINGLE SPLIT WANDMODEL WARMTEPOMP

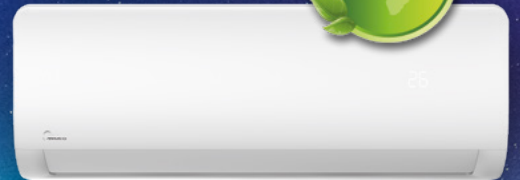


Warmtepomp | Fluisterstille werking | Slaapmodus | Turbo mode | Winterregeling -25°C / +50°C
3D Luchtcirculatie | 8°C Temperatuursfunctie | 1W Standby | Follow me functie | Base Pan Heater

WWW.MIDEA-NEDERLAND.NL

Super DC inverter

SETNAAM		XTREME-SAVE-PRO-09	XTREME-SAVE-PRO-12	XTREME-SAVE-PRO-18	XTREME-SAVE-PRO-24
BINNENUNIT		MSAGAU-09HRFN8-ME	MSAGBU-12HRFN8-ME	MSAGCU-18HRFN8-ME	MSAGDU-24HRFN8-ME
BUITENUNIT		MOX201-09HFN8-ME	MOX201-12HFN8-ME	MOX301-18HFN8-ME	MOX401-24HFN8-ME
CAPACITEIT					
Koelcapaciteit	kW	2,64 (1,02-3,22)	3,52 (1,37-4,30)	5,30 (3,39-5,90)	7,00 (1,55-8,21)
SEER	W/W	8,8	8,5	7,0	6,4
Energieklasse koeling		A+++	A+++	A++	A++
Verwarmingscapaciteit	kW	3,2 (0,82-3,37)	3,8 (1,07-4,38)	5,6 (3,10-5,85)	7,3 (1,55-8,21)
SCOP	W/W	4,6	4,6	4,0	4,0
Energieklasse verwarming (H/A)		A++	A++	A++	A++
SCOP	W/W	6	6	5,1	5,1
Energieklasse verwarming (H/W)		A+++	A+++	A+++	A+++
Verwarmingscapaciteit bij -10°C	kW	2,26	2,94	4,3	5,88
Luchtstroom binnenunit L/M/H	m ³ /h	360/510/560	370/520/630	500/600/800	610/770/1090
Luchtstroom buitenunit	m ³ /h	2150	2200	2100	3500
ELEKTRICITEIT					
Voeding		220-240V / 50Hz / 1Ph	220-240V / 50Hz / 1Ph	220-240V / 50Hz / 1Ph	220-240V / 50Hz / 1Ph
Afzekerwaarde (traag)	A	16 traag	16 traag	16 traag	16 traag
Voedingskabel	mm ²	3 x 2,5	3 x 2,5	3 x 2,5	3 x 2,5
Aansluitkabel binnen-buitendeel	mm ²	5 x 1,5	5 x 1,5	5 x 1,5	5 x 1,5
Opgenomen vermogen koelen	W (min.-max.)	628 (80-1100)	1005 (130-1650)	1550 (560-2050)	2402 (420-3200)
Opgenomen vermogen verwarmen	W (min.-max.)	651 (70-990)	977 (160-1560)	1750 (780-2000)	2130 (300-3100)
Bedrijfsstroom koelen	A	2,73 (0.35-4.78)	4,37 (0.6-7.2)	6,7 (2.4-9)	10,5 (1.8-13.9)
Bedrijfsstroom verwarmen	A	2,83 (0.32-4.32)	4,24 (0.7-6.78)	7,6 (3.4-8.7)	9,3 (1.3-13.5)
Bedrijfsstroom max	A	11	11	13	19
GELUID					
Geluidsdruk binnenunit SL/L/M/H op 1m.	dB(A)	19/22/31/37	21/22/33/38	20/31/37/41	21/34,5/37/46
Geluidsdruk buitenunit op 1m.	dB(A)	54	55.0	57	60
AFMETINGEN EN GEWICHTEN BINNENUNIT					
Afmeting (BxDxH)	mm	835x208x295	835x208x295	969x241x320	1083x244x336
Gewicht	kg	8,7	8,7	11,2	13,6
AFMETINGEN EN GEWICHTEN BUITENUNIT					
Afmeting (BxDxH)	mm	765x303x555	765x303x555	874x330x554	955x342x673
Gewicht	kg	26,7	26,7	33,5	43,9
KOUDEMIDDELCIRCUIT					
Type/GWP		R32/675	R32/675	R32/675	R32/675
Vulling/voorgevuld tot/bijvulling	kg / m / g/m	1,0 / 5m / 12	1,0 / 5m / 12	1,1 / 5m / 12	1,45 / 5m / 12
Diameter vloeistof/gasleiding	inch	1/4" x 3/8"	1/4" x 3/8"	1/4" x 1/2"	3/8" x 5/8"
Max. leidinglengte	m	25	25	30	50
Max. hoogteverschil	m	10	10	20	25
BEDIENING					
Infrarood afstandsbediening		RG10A1(B2S)/BGEF	RG10A1(B2S)/BGEF	RG10A1(B2S)/BGEF	RG10A1(B2S)/BGEF
WERKGEBIED					
Werkgebied koelen	°C	-15 / +50	-15 / +50	-15 / +50	-15 / +50
Werkgebied verwarmen	°C	-25 / +24	-25 / +24	-25 / +24	-25 / +24



Follow Me	2-Way Draining	R32 Refrigerant	Louver Position Memory	3D Air Flow	Horizontal-Flow	Timer	Anti-Cold Air Function	8°C Heating	Refrigerant Leakage Detect	GA Stepless Comfort Technology	TURBO	Healthy Filters	Low Ambient Cooling
Remote Control	Emergency Using	1W Standby	Sleep-Mode	Auto-Restart Function	Remote Control App	Base Pan Heater							